

Selecting language and Pairing to your Bluetooth Mobile Phone

The SuperTooth HD needs to be paired to your Bluetooth mobile phone to create the link or audio connection between the two. Pairing should be done only at the first connection to a phone.

1. Pair your phone at first time use

For first time use, when you will turn the SuperTooth HD on by pressing button **(7)** for 1 second, it will instruct you to select the preferred language to use.

Note: There are 6 languages featured in the SuperTooth HD, British English, American English, French, Italian, Spanish and German.

The kit will say, "Press Volume Control **(1)** to select British English." The SuperTooth HD will cycle through all available languages. Short press the Volume Control button **(1)** when you hear your language.

If the British English language is chosen, the kit will say, "British English selected. From phone's Bluetooth menu, search for devices then select SuperTooth HD. Enter pin code 0000 if requested." This means the kit is now ready to be paired. Access the Bluetooth menu of your phone then execute a Bluetooth search. Then follow the handsfree kit and phone prompts to pair the SuperTooth HD.

See 3. Automatic Phonebook Transfer

IMPORTANT: Accept any connection or pairing prompt on your phone and follow the voice prompts to pair the SuperTooth HD with your mobile phone.

2. Pair an additional phone

Turn on the SuperTooth HD. Disconnect any connected phone by disabling its Bluetooth function or by turning the connected phone(s) off.

The SuperTooth HD is now discoverable and pairable. You can connect any phone you want by executing a Bluetooth search on the phone you want to connect, then selecting SuperTooth HD in the list of found Bluetooth devices.

Note: Accept any connection or pairing prompt on your phone and follow the voice prompts to pair the SuperTooth HD with your mobile phone. The pairing code is 0000 (four zero's).

3. Automatic Phonebook Transfer

After the successful pairing, a voice will announce "Pairing successful to phone. Loading Phonebook. Please wait." "Connected to phone." "Accept any connection request on phone." The handsfree kit will start downloading your phonebook contacts. The number of contacts will be announced as download is ongoing.

Note: Accept any request (Connection...?, allow Internet access...?, DUN...?) prompt on your phone. **On Android phones, the connection request could appear in the top part of the screen.**

Voice commands (only available in English and French)

1. If you want to listen to the list of the commands,
Press the Volume Control button **(1)** for 1 second. After the beep, say "What can I say?" and you will hear:

You can say:

- Check Battery
- Am I Connected?
- What Can I Say?
- Voice Dial
- Redial Last Number
- Call Home
- Call Office
- Call Voice Mail
- Call Emergency
- Call Contact 1, 2, 3, 4 or 5
- Cancel
- Answer
- Reject
- Ignore

2. When you receive a call,

You can say (After the beep):

- Answer
- Reject
- Ignore

3. If you want to call,

Press the Volume Control button **(1)** for 1 second. After the beep, you can say:

- Voice Dial*
- Redial Last Number*

*If supported by phone.

For the following commands, you need to create special contact numbers. For instance:

You can call your favorite contacts by voice. You need to create new contacts in your phone phonebook with a dot and a number preceding the name.

Example: •2John This contact will be called via the voice command "Call contact 2". You can create 5 favorite contacts. **(The dot and the number are mandatory).**

Random examples of names and phone numbers:

VOICE COMMAND	CONTACT NAME	PHONE NUMBER
Call Contact 1	•1Dupond	+33 999999999
Call Contact 2	•2John	+44 9999 999999
Call Contact 3	•3Paul	+1 999 999 9999
Call Contact 4	•4Sam	+61 9 9999 9999
Call Contact 5	•5Javier	+34 999999999
Call Home	•6Home	+1 999 999 8888
Call Office	•7Office	+1 888 888 9999
Call Voice mail	•8Voicemail	123
Call Emergency	•9Emergency	911

As soon as your contacts are created, long press the  button **(8)** for 5 seconds to update your handsfree kit phonebook.

Note: Please fill only one name and phone number field for each contact.

To download the user guide in full version please go to www.supertooth.net.

0000
Pairing code

0000
Pairing code

Quick start guide



SUPERTOOTH HD

SuperTooth HD is a Bluetooth voice controlled handsfree kit.

With this handsfree kit, you can access your phone's functions easily by using your voice.

You can make outgoing calls, answer, reject or ignore an incoming call, and so much more, simply using your voice. The SuperTooth HD announces caller's name if it's stored in the phonebook.

The SuperTooth HD has many other features. It includes A2DP Music Streaming (as well as Nav. Instructions with your smartphone), Multi-Point, 3-Way Calling and Full DSP (Noise/Echo Cancellation). The SuperTooth HD is designed for an easy and handsfree use. It has superior performances and a powerful and amazing sound quality.

Don't forget: Drive safely and within the law. Check if the national or local legislation into force in your country does limit the use of mobile phones while driving. It is up to the user of this product to respect the said legislation in the area where he lives.

Correct Disposal of This Product
(Waste Electrical & Electronic Equipment)

(Applicable in the European Union and other European countries with separate collection systems). This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal. This product has an embedded, non-replaceable battery, do not attempt to open the product or remove the battery as this may cause injury and damage the product. Please contact the local recycling facility for removal of the battery. The embedded, non-replaceable battery is designed to last the life time of the product.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal. This product has an embedded, non-replaceable battery, do not attempt to open the product or remove the battery as this may cause injury and damage the product. Please contact the local recycling facility for removal of the battery. The embedded, non-replaceable battery is designed to last the life time of the product.

Hereby, EURO COMMUNICATION EQUIPEMENTS, represented by Xavier MARCHANT, CEO, declares that the SuperTooth HD MODEL BTHD, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.

CE 0560

For the whole declaration please visit : <http://www.supertooth.net/download>

Euro Communication Equipements SAS
Route de Foix D117
11500 NEBIAS (FRANCE)

Federal Communications Commission (FCC) Statement
Industry Canada (IC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

- 1) This device may not cause interference and
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.


FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Installation

Install the metal clip of SuperTooth HD on the sun visor.

Attach the magnetic back of SuperTooth HD to the metal clip. The SuperTooth HD must be placed in such a way that its microphone is directed to the mouth of the user.

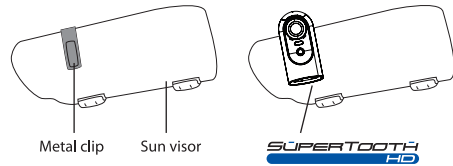

Specifications

Bluetooth Compliance:	Bluetooth version 3.0 specifications
Supported Bluetooth Profiles:	A2DP / Supports headset and handsfree profiles with automatic detection
Operating Range:	Up to 10 meters
Frequency:	2.4 GHz
Talk Time:	Up to 20 hours
Stand-by time:	Up to 1000 hours (40 days)
Charging Time:	3 hours
Battery Type:	Rechargeable Lithium Ion

Special Features:

- Voice to announce Caller ID, Bluetooth device status and instruction guides in 6 languages (British English, American English, French, Italian, Spanish and German)
- Full Duplex
- Full DSP Noise Cancellation / Echo Cancellation
- Easy Pairing
- Digital Volume Control
- Answer/Ignore/Reject Incoming Calls by Voice Control
- Voice Recognition Dialing (If phone supports)
- Last Call Redial
- Can also be charged directly from a PC via USB Cable (included)
- Music Streaming (A2DP)
- Multipoint
- Three Way Calling
- Auto Power On / Off
- High power speakers, V Array technology
- Firmware updatable via USB Data cable
- Automatic reconnection

Multipoint:	Can be paired up to 8 devices Maximum of 2 phones monitored
Installation:	Quick fixing on sun visor via metal clip
Dimensions (mm):	125 x 61 x 26 mm
Weight:	111 g

(1) Volume Control button :

1. Turn right to increase the volume, turn left to decrease.
2. Press it for 1 second to answer or end a call.
3. Press it for 3 second to reject a call.
4. In stand by, press it for 1 second to activate the "voice commands".
5. In stand by, press it for 3 seconds to redial.

(2) Bluetooth indicator :

- Steady blue : in communication.
- Blinking blue : connected / paired / on.
- Led turns red : low battery.
- Blinking red/blue : pairing mode.

(3) Speakers


(4) Microphone

(5) Charger's plug (micro-USB) and update plug


(6) Charge indicator:

- Steady orange : charging
- Steady green : battery full


(7) On/Off button:

- Press  button for 1 second to switch the unit ON or OFF.

(8) "SuperTooth HandsFree Assistant" button :

1. Phone connected with the SuperTooth HD, press button  for 1 second will automatically dial the "SuperTooth HandsFree Assistant".

NB: A default number is stored inside the kit for the "SuperTooth HandsFree Assistant". You can modify this number anytime creating a new contact named **.0Assistant** (the dot and the zero are mandatory) with the phone number you need. Then, update your phonebook as following:

2. Press  button for 5 seconds in order to start an automatic phonebook update (in case you've added or renamed some contacts).

